


INSTALLATION




3

Using the remaining two beams assembled in Step 1, align the other set of left and right vertical rails, then fasten them to the base and top brackets as shown.

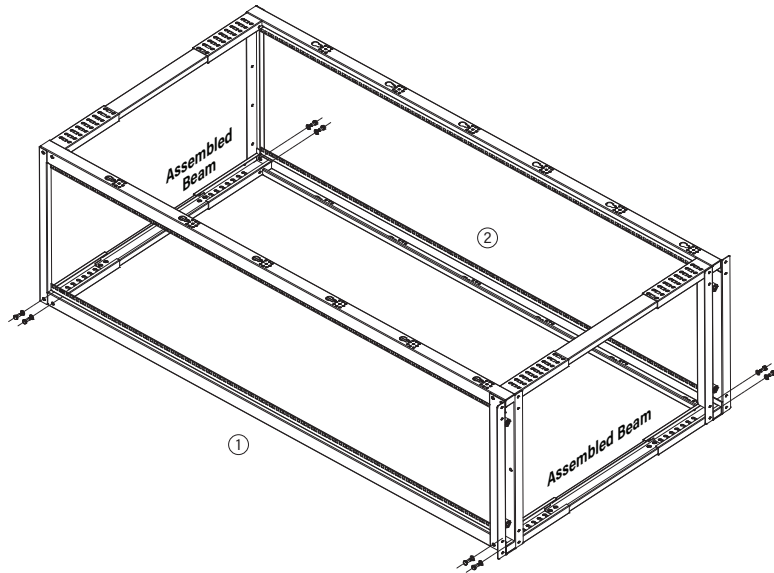

OPTIONAL COMPONENT INSTALLATION

- Install the four casters and four leveling feet as shown.
- Stand the rack upright, then install the included cable management hooks in the desired locations as shown.
- Install the #6 toothed lock washer onto the M6 phillips screw, then secure the grounding wire to the grounding hole inside the rack base. Tighten the bolt using the phillips screw driver, route the wire under the rack frame, and connect the other end to an earth-ground point.

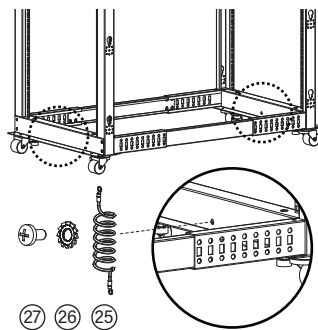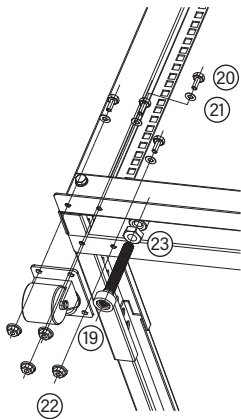


MAINFRAME 4-POST OPEN FRAME RACK SERIES

OFAR-22/42U

ASSEMBLY INSTRUCTION


V. 1.0

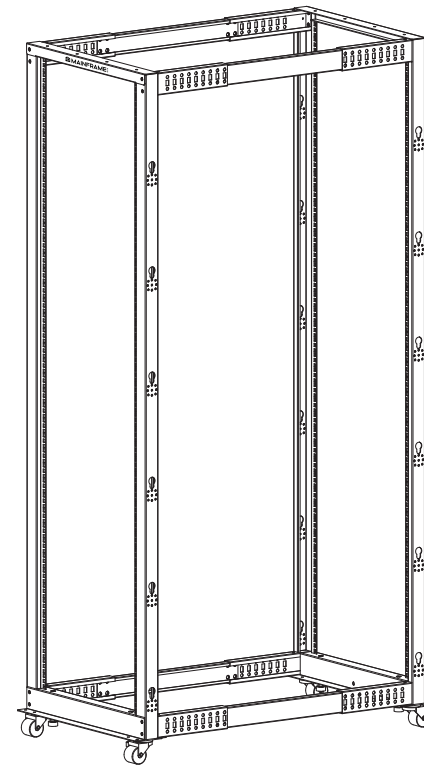

Scan for
Specifications

PACKAGE CONTENTS


Verify that all package contents are included before proceeding with assembly.

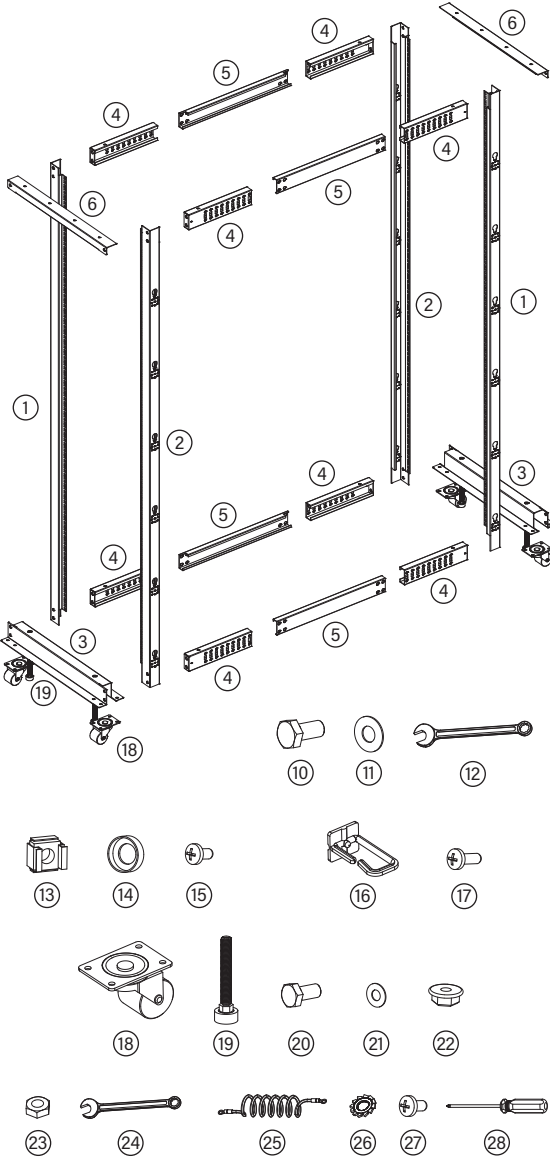

ID	NAME	Qty	
		22U	42U
Rack Components			
1	LEFT Vertical Rail	2	
2	RIGHT Vertical Rail	2	
3	Base Bracket	2	
4	Corner Section	8	
5	Center Section	4	
6	Top Bracket	2	
Rack Assembly Hardware			
10	M8 Bolt	48	
11	M8 Washer	48	
Rack Assembly Tool			
12	M8(13mm) Wrench	1	
Equipment Mounting Hardware			
13	10-32 Cage Nut	20	40
14	PVC Cup Washer	20	40
15	10-32 Phillips-Head Screw	20	40
Cable Management Hardware			
16	Cable Management HOOK	12	24
17	HOOK Mounting Screw	12	24
Casters and Hardware			
18	Caster	4	
19	Leveling Foot	4	
20	M6 Screw	16	
21	M6 Flat Washer	16	
22	M6 Flange Nut	16	
23	M12 Hex Nut	4	
24	M8(10mm) Wrench	1	
Grounding Hardware			
25	Grounding Wire	2	
26	#6 Toothed Lock Washer	4	
27	M6 Pan Head Screw	4	
28	Phillips Screwdriver	1	

INSTALLATION

1 Assemble the four top and bottom beams as shown below. Adjust the beams to the desired mounting depth using the index numbers marked on the center sections. Align the mounting holes with the eight pre-installed M8 riveted threaded nuts on each center section, and secure the assembly using the M8 bolts and M8 washers. Refer to the mounting-depth chart.

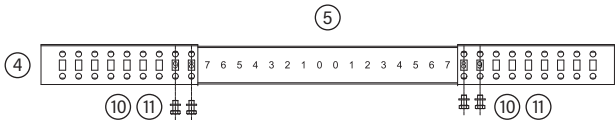

Note: Mounting depths from 22 to 40 inches are available by aligning the beams with the corresponding silkscreened index numbers.

Rack Adjustable Depth Index Numbers	
Mounting Depth	Index Numbers
22 in.	0 and 0
23 in.	1 and 0
24 in.	1 and 1
25 in.	1 and 2
26 in.	2 and 2
27 in.	2 and 3
28 in.	3 and 3
29 in.	3 and 4
30 in.	4 and 4
31 in.	4 and 5
32 in.	5 and 5
33 in.	5 and 6
34 in.	6 and 6
35 in.	6 and 7
36 in.	7 and 7
37 in.	7 and 8
38 in.	8 and 8
39 in.	8 and 9
40 in.	9 and 9

2 Using two of the beams assembled in the previous step, align one set of left and right vertical rails with the base and top brackets, then fasten them as shown.

